


NORTH AND SOUTH EASTON POND · NEWPORT · RHODE ISLAND
CRMC PERMIT APPLICATION



LOCATION MAP
SCALE: 1" = 1000'

SHEET INDEX

<u>SHEET No.</u>	<u>SHEET TITLE</u>
CV-001	COVER SHEET
CS-101	EXISTING CONDITION PLAN
CS-102	PROPOSED SITE GRADING PLAN
CS-103	PROPOSED LANDSCAPE PLAN
CD-501	DETAIL SHEET

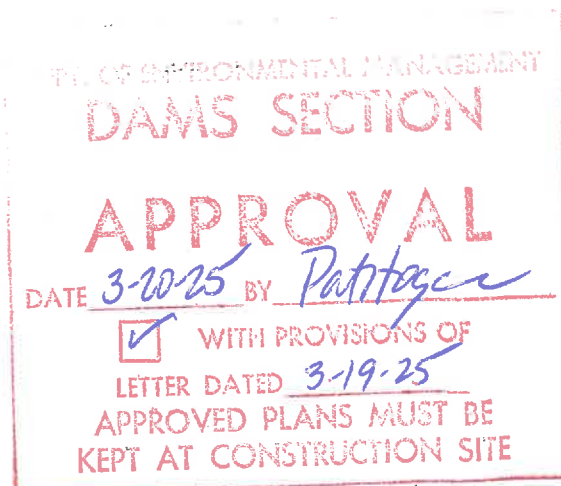


RECEIVED
FEB 24 2025

RIDEM
Compliance & Inspection


PROJ. No.: NSEPDR-CRCM
DATE: FEBRUARY 20, 2025

CV-001

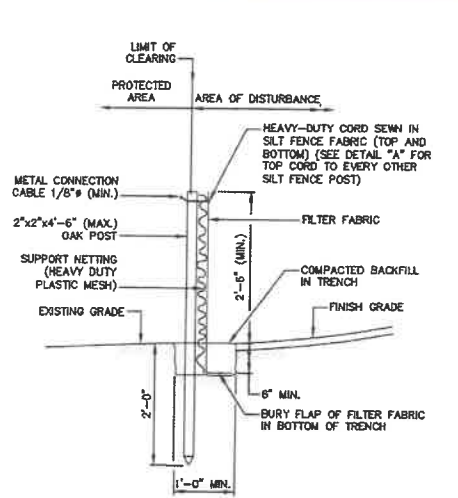


NOTES:

1. SHALL BE IN ACCORDANCE WITH SECTION 206 OF THE R.I. STANDARD SPECIFICATIONS.
2. 2"x2"x4'-6" (MAX.) OAK POSTS FOR SILT FENCE SHALL BE LOCATED 6'-0" (MAX.) O.C. IN WETLAND AREAS AND 4'-0" (MAX.) O.C. IN WETLAND RAINE, GULLY OR DROP-OFF AREAS AS SHOWN ON PLANS.
3. 1"x1"x4'-6" (MIN.) POSTS PERMITTED FOR PRE-FABRICATED SILT FENCE.
4. SILT FENCE SHALL BE INSTALLED BEFORE ANY GRUBBING OR EARTH EXCAVATION TAKES PLACE.




SILT FENCE DETAIL (R.I. STD. 9.2.0)

NOT TO SCALE

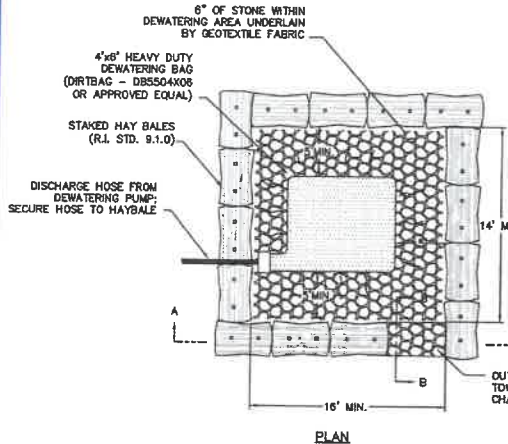


NOTES:

1. HAY BALES FOR EROSION CONTROL SHALL CONFORM TO SECTION 206 OF THE RIDOT STANDARD SPECIFICATIONS INCLUDING MATERIALS AND CONSTRUCTION METHODS.
2. BALES OF HAY SHALL BE FASTENED WITH WIRE AND HAVE A MINIMUM SIZE OF 1'x1.5'x3'.
3. FILTER STONE SHALL CONSIST OF 2 INCH MINUS STONE CONFORMING TO PS-2 FILTER STONE PER SUBSECTION M10.03.1 OF THE STANDARD SPECIFICATIONS.
4. FILTER FABRIC SHALL BE A NON-WOVEN GEOTEXTILE FILTER FABRIC AND SHALL CONFORM TO SECTION 205.02.2 OF THE STANDARD SPECIFICATIONS.

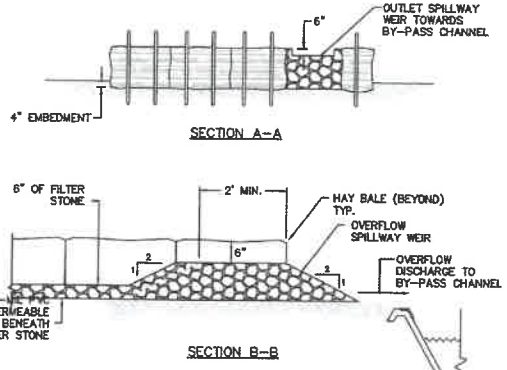

BALED HAY EROSION CHECK (R.I. STD. 9.1.0)

NOT TO SCALE

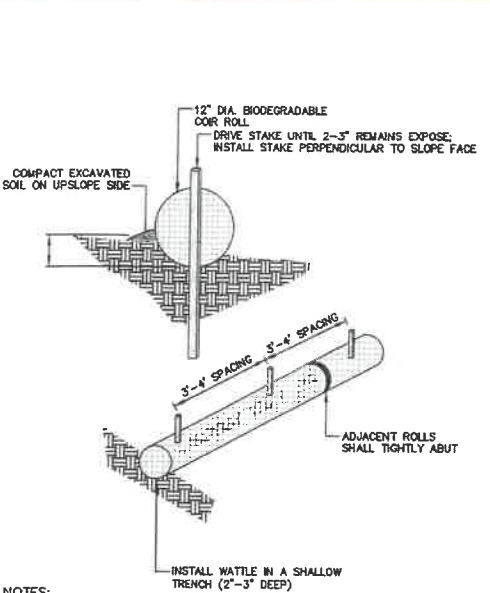


NOTES:

1. BEGIN AT THE LOCATION WHERE THE COIR ROLL IS TO BE INSTALLED BY EXCAVATING A 2" TO 3" DEEP BY 8" WIDE TRENCH ALONG THE CONTOUR OF THE SLOPE. EXCAVATED SOIL SHOULD BE PLACED UP-SLOPE FROM THE ANCHOR TRENCH.
2. PLACE THE COIR ROLL IN THE TRENCH SO THAT IT CONTOURS TO THE SOIL SURFACE. COMPACT SOIL FROM THE EXCAVATED TRENCH AGAINST THE WATTLE ON THE UPSLOPE. ADJACENT COIR ROLLS SHALL TIGHTLY ABUT.
3. SECURE THE COIR ROLL WITH 36" LONG (2"x2") STAKES SPACED EVERY 3' TO 4' ON CENTER AND WITH A STAKE ON EACH END. STAKES SHOULD BE DRIVEN THROUGH THE MIDDLE OF THE COIR ROLL LEAVING AT LEAST 2" TO 3" OF STAKE EXTENDING ABOVE THE COIR ROLL. STAKES SHALL BE DRIVEN PERPENDICULAR TO THE SLOPE FACE.

BIODEGRADABLE COIR LOG

NOT TO SCALE

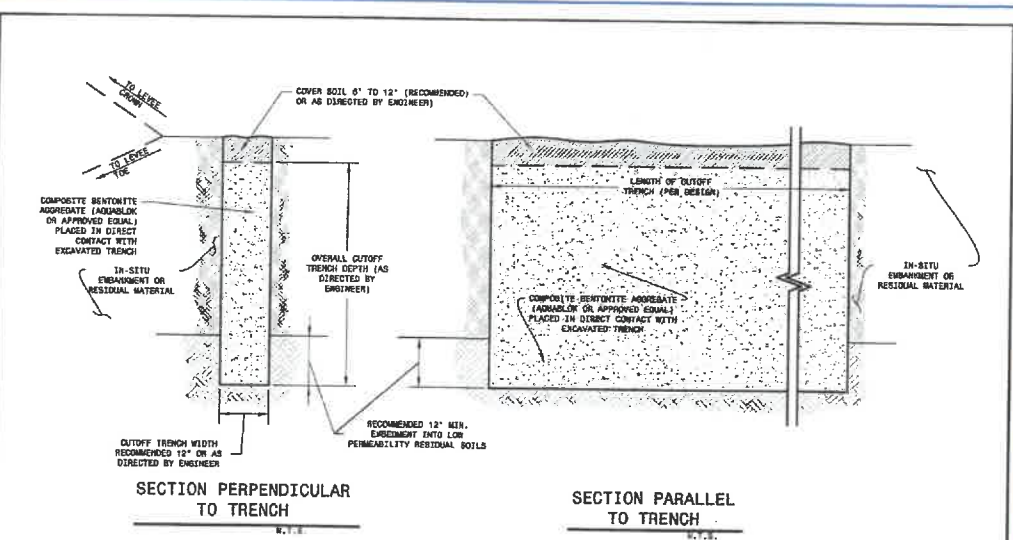

NOTES:


1. THE CUTOFF TRENCH DIMENSIONS SHALL BE DIRECTED BY THE ENGINEER AND DEPICTED ON THE CONSTRUCTION DRAWINGS.
2. WHEN EXCAVATING ANY TYPE OF TRENCH, ALL PRECAUTIONS AND PROTECTIVE SYSTEMS REQUIRED BY THE OCCUPATIONAL HEALTH AND SAFETY ADMINISTRATION MUST BE EMPLOYED.
3. NO MORE TRENCH LENGTH SHOULD BE EXCAVATED THAN CAN BE REASONABLY BACKFILLED AND COVERED WITHIN ONE DAY.
4. TRENCHES WIDER THAN 12 INCHES ARE RECOMMENDED FOR COMPOSITE BENTONITE AGGREGATE (AQUABLOK) PLACEMENT IN LIFTS OF 12 INCHES OR MORE IN DEPTH.
5. THE TRENCH DEPTH SHOULD EXTEND A MINIMUM OF 12 INCHES VERTICALLY INTO LOW PERMEABILITY RESIDUAL SOIL.
6. SOIL COVER ABOVE TRENCH TO FINISH GRADE SHALL BE DIRECTED BY ENGINEER, WITH 6 IN. TO 12 IN. RECOMMENDED.
7. SEE "DAM / LEVEE EMBANKMENT" APPLICATION TECH SHEET BY AQUABLOK, LTD. FOR MORE INFORMATION.

QUANTITY SCHEDULE			
TRENCH WIDTH	IN.		
TRENCH DEPTH (OVERALL)	FT.		
MINUS COVER SOIL	IN.		
TRENCH LENGTH	FT.		
TOTAL CF	CF		
TOTAL CY	FT.		
TONS (11CFX0.0425)	TONS		

AquaBlok
178 WOODLAND AVE.
BRIMLEY, OHIO 43558
419-825-1925
www.aquablok.com

CUTOFF (CORE) TRENCH DETAIL FOR SEEPAGE CONTROL/ENHANCEMENT OF LEVEES/DAMS (NOT TO SCALE)

PROJECT NO.: A08105	SUBMITTAL DATE: FEBRUARY 2021
CAD FILE: A08105_100_0037	PLOT DATE: 2/12/2021

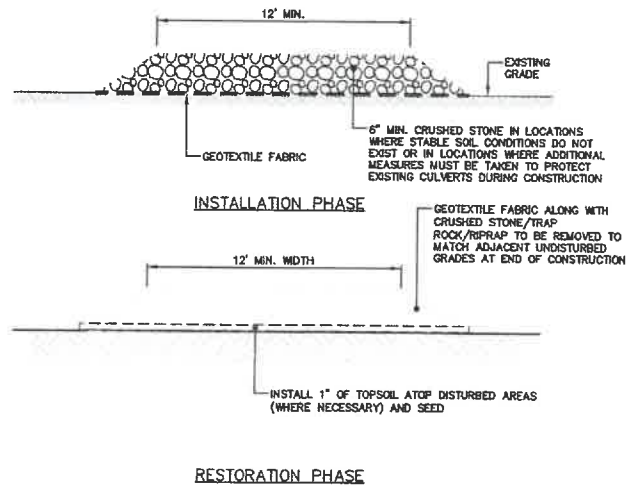


NOTES:

1. PLACE ADDITIONAL CRUSHED STONE AS REQUIRED THROUGHOUT CONSTRUCTION TO MAINTAIN STABLE ACCESS IN LOCATIONS ALONG ACCESSES WHERE STABLE SOILS DO NOT EXIST OR IN LOCATIONS WHERE ADDITIONAL MEASURES MUST BE TAKEN TO PROTECT EXISTING CULVERTS DURING CONSTRUCTION.
2. FOR WET AREAS, CONTRACTOR SHALL FURNISH AND PLACE ADDITIONAL MEASURES (E.G. SWAMP MATS, GEOTEXTILE FABRIC, TRAP ROCK/RIPRAP, ADDITIONAL STONE, ETC.) AS REQUIRED TO MAINTAIN STABLE ACCESS FOR CONSTRUCTION EQUIPMENT AND VEHICLES REQUIRED TO COMPLETE WORK.
3. IN SUCH LOCATIONS WHERE ADDITIONAL CRUSHED STONE, TRAP ROCK/RIPRAP, ETC. IS REQUIRED, INSTALL MATERIALS ATOP GEOTEXTILE FILTER FABRIC TO FACILITATE THE REMOVAL OF THIS MATERIAL PRIOR TO RESTORATION ACTIVITIES.
4. AT END OF CONSTRUCTION AND PRIOR TO RESTORATION, REMOVE ALL GEOTEXTILE FILTER FABRIC AND STONE (I.E. THAT ABOVE ADJACENT EXISTING GROUND ELEVATION), TOP DRESS AREA WITH TOPSOIL (AS REQUIRED) AND SEED TO ESTABLISH GRASS VEGETATION.
5. CONTRACTOR SHALL PREPARE AND SUBMIT A DETAILED CONSTRUCTION ACCESS AND MAINTENANCE PLAN INDICATING PHASING, VEHICLES/EQUIPMENT, LOCATIONS AND TYPES OF MATERIALS TO BE EMPLOYED TO CREATE AND MAINTAIN STABLE ACCESS THROUGHOUT CONSTRUCTION WHILE AVOIDING IMPACTS TO EXISTING BURIED UTILITIES AND ASSURING CONTINUED ACCESS BY OWNER TO ALL SITE FACILITIES.

TEMPORARY CONSTRUCTION ACCESS ROUTE

NOT TO SCALE

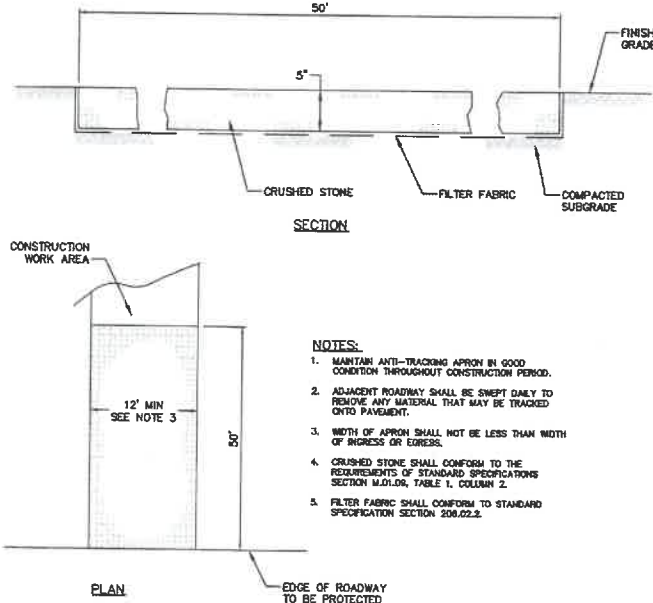


NOTES:

1. MAINTAIN ANTI-TRACKING APRON IN GOOD CONDITION THROUGHOUT CONSTRUCTION PERIOD.
2. ADJACENT ROADWAY SHALL BE SWEPT DAILY TO REMOVE ANY MATERIAL THAT MAY BE TRACKED ONTO PAVEMENT.
3. WIDTH OF APRON SHALL NOT BE LESS THAN WIDTH OF HIGHWAY OR EXPRESS.
4. CRUSHED STONE SHALL CONFORM TO THE REQUIREMENTS OF STANDARD SPECIFICATIONS SECTION M10.03, TABLE 1, COLUMN 2.
5. FILTER FABRIC SHALL CONFORM TO STANDARD SPECIFICATION SECTION 205.02.2.

CONSTRUCTION ACCESS (R.I. STD. 9.9.0)

NOT TO SCALE

NO.	DATE	DESCRIPTION



PREPARED FOR
CITY OF NEWPORT
DEPARTMENT OF UTILITIES
70 HALSLEY STREET
NEWPORT, RI 02840



NORTH AND SOUTH EASTON POND DAM REPAIR
100 BLISS MINE ROAD
MAP 11, LOT 731
NEWPORT, RHODE ISLAND 02840

CONSTRUCTION DETAILS

PROJ. NO. NSEPDR-CRCM
DATE: 2-20-2025

CD-501